

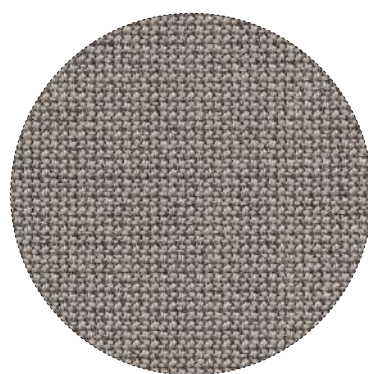



CURA

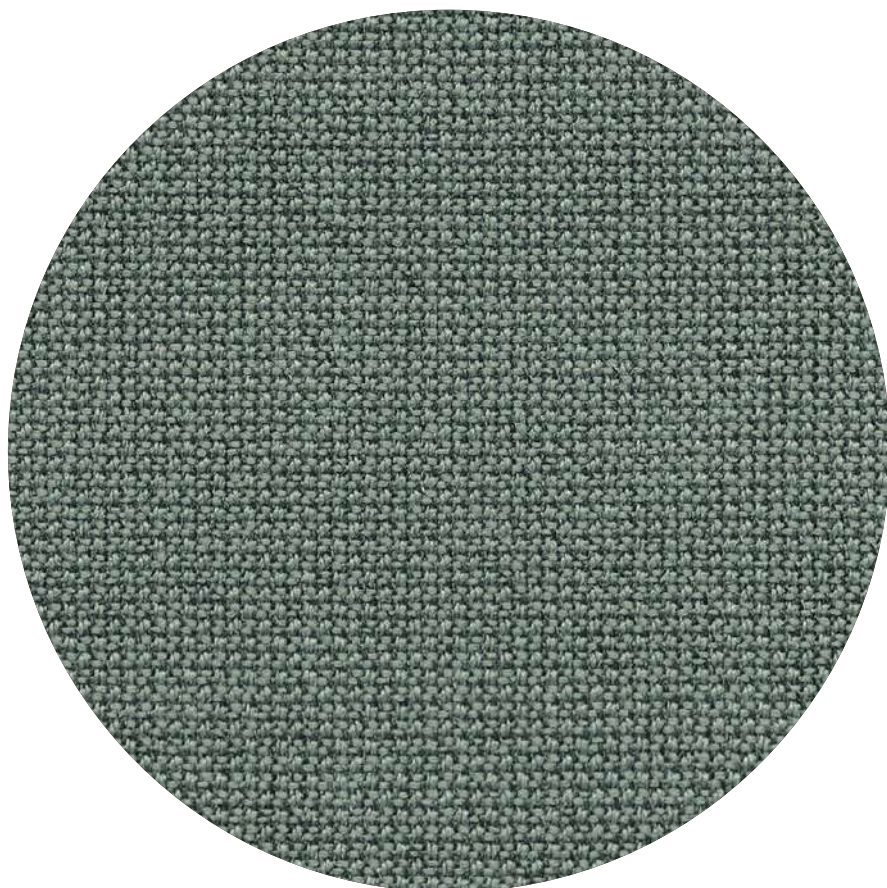


SANCAL 

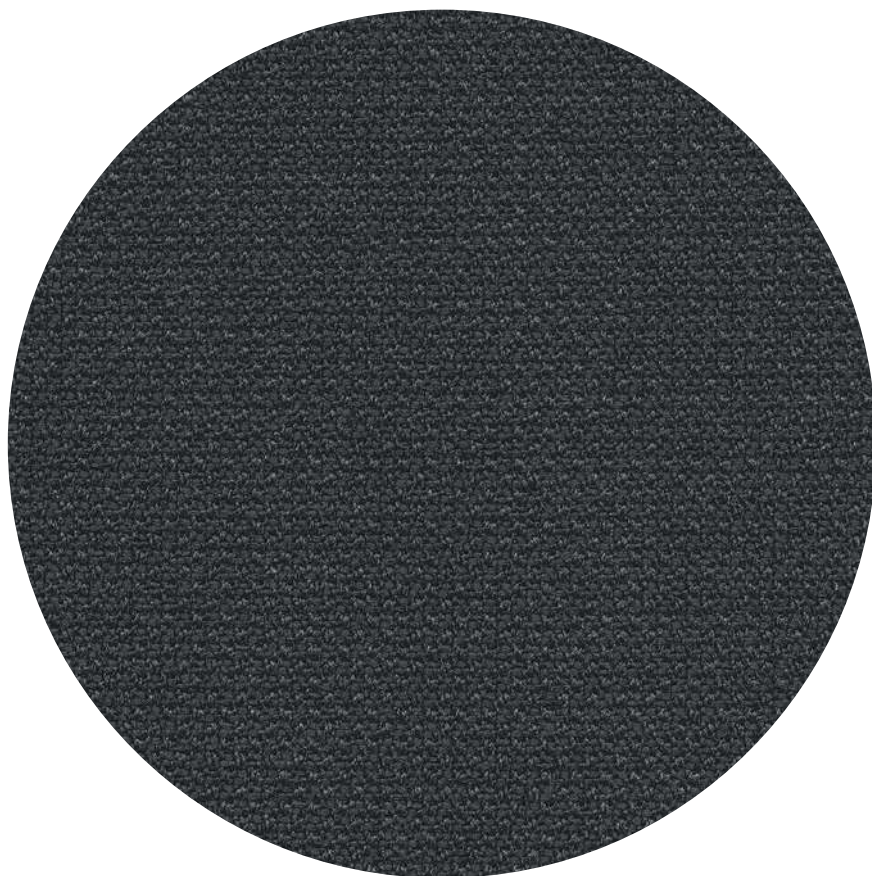


60019



60000




60109




60110




60111

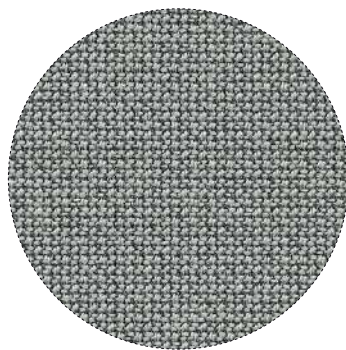


60112

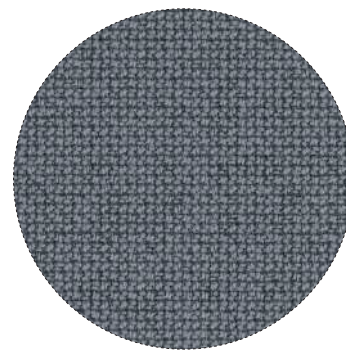

60327




60999



61168




61169




61232




61233



61257




61258



61259




61260

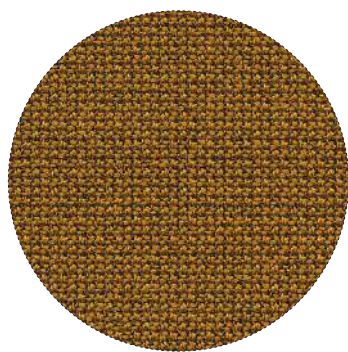


62082




62083

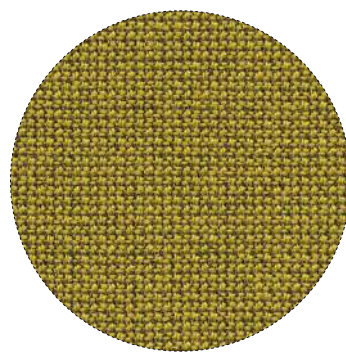


62084

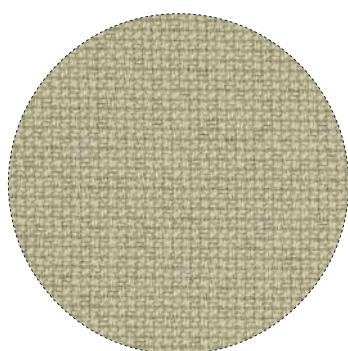


62125

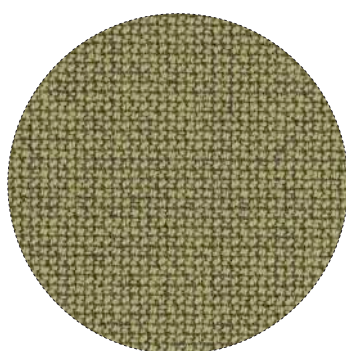


62126

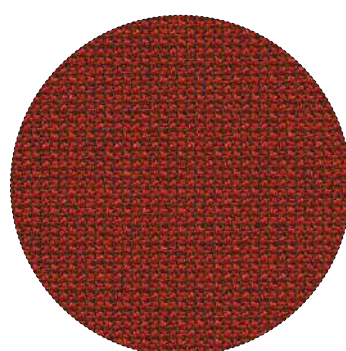


63012

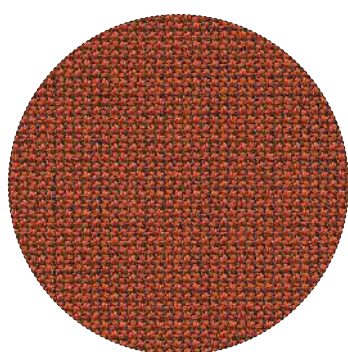


63078

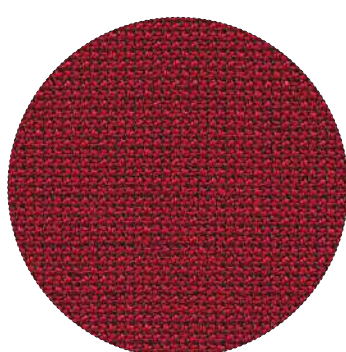


64013

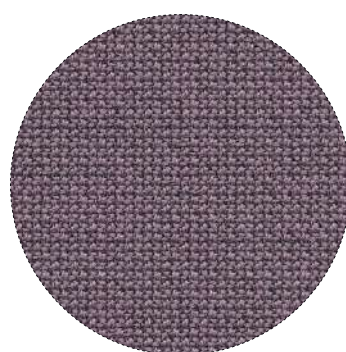


64194

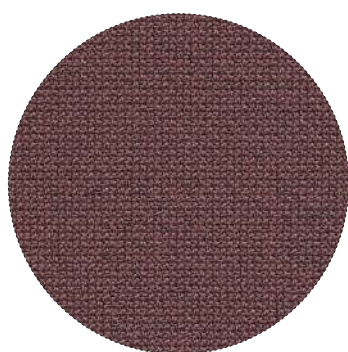


64195

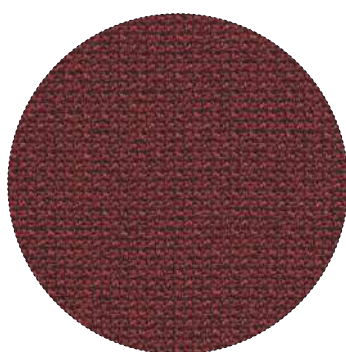


64196

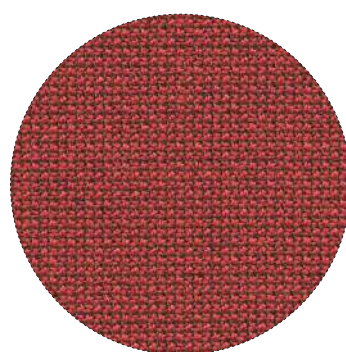


64197




64240




64252




65105

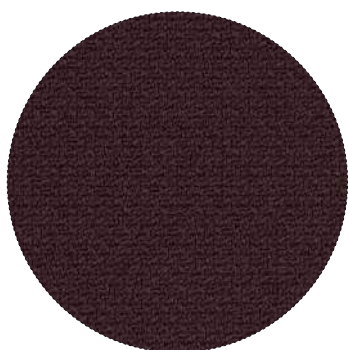


65137

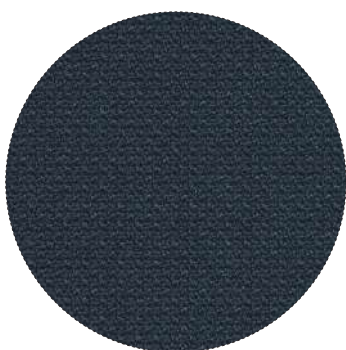


66165

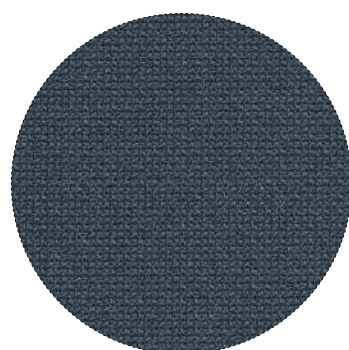


66166




66167




66169




66170




66239



66240




67084




68180




68181




68182



68183




68186




68187




68261



68262



68263

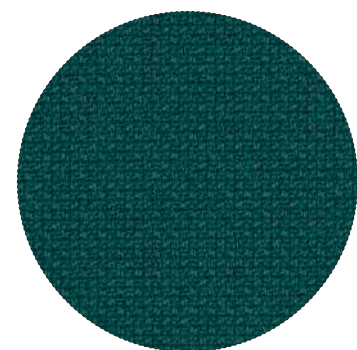

68264

Composition Composición		98% recycled post-consumer PE 2% PE
Weight Peso		420 gr/ml
Minimum usable width Ancho		140 cm
Abrasion (martindale) Resistencia a la abrasión		aprox. 110.000 EN ISO 12947
Pilling resistance Resistencia al pilling		5 EN ISO 12945
IMO		-
OEKO-TEX STANDARD 100		Pass Pasa
Flame resistance Resistencia al fuego	Cigarette test Cigarrillo	Pass Pasa EN 1021-1
	Match test Cerilla	Pass Pasa EN 1021-2
	California Technical Bulletin	Pass Pasa TB 117
Lightfastness Solidez a la luz		5-8 EN ISO 105-B02
Colour fastness to rubbing Solidez al frote	Dry Seco	4-5
	Wet Mojado	4-5 ISO 105-X12
Cleaning advise (loose covers) Condiciones de lavado		      

Important Key information about how different materials behave, and how they should be cared for can be found at https://sancal.com/care Significant variances in colour between batches are common. Surface clean any liquids by dabbing with a damp cloth immediately after spillage to minimise soiling. Never rub. Check the technical specification sheet to see if the cover can be removed from your product by visiting https://sancal.com/technicals If you remove the cover, attach a protective cloth to the fastening strips to avoid damaging the fabric.	Importante Información clave sobre el comportamiento de los diferentes materiales que empleamos y su conservación está disponible en: https://sancal.com/care Muestras indicativas. Existen variaciones de color entre lotes. Limpie los líquidos con un trapo húmedo inmediatamente después del derrame para minimizar daños. No frote el textil. Compruebe la hoja de características técnicas para saber si su producto es desenfundable https://sancal.com/tecnicos Si decide desenfundar su producto, coloque una tela protectora sobre las cintas de sujeción para evitar daños en la tapicería.
---	---