






0065



0066




0067

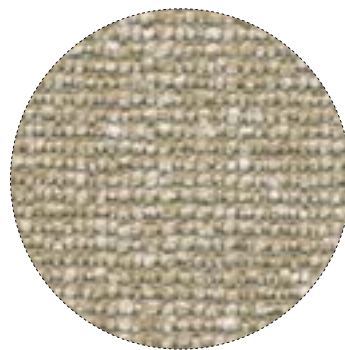

0068



0069



0070



0071




0072



0073



0074

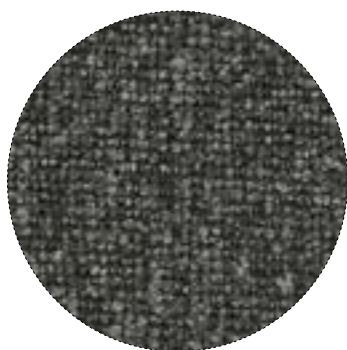

0075

Composition Composición		PES 100%
Weight Peso		550 gr/mtl
Minimum usable width Ancho		138 cm
Abrasion (martindale) Resistencia a la abrasión		> 100.000 EN ISO 12947-2
Pilling resistance Resistencia al pilling		4 EN ISO 12945-2
IMO		-
OEKO-TEX STANDARD 100		-
Flame resistance Resistencia al fuego	Cigarette test Cigarrillo	Pass Pasa BS 5852 source 0
	Match test Cerilla	-
	California Technical Bulletin	Pass Pasa TB117
	Crib 5	-
Lightfastness Solidez a la luz		5 EN ISO 105-B02
Colour fastness to rubbing Solidez al frote		4 4 EN ISO 105-X12
Cleaning advise (loose covers) Condiciones de lavado		      

Important

Key information about how different materials behave, and how they should be cared for can be found at <https://sancal.com/care>

Surface clean any liquids by dabbing with a damp cloth immediately after spillage to minimise soiling. Never rub.

Check the technical specification sheet to see if the cover can be removed from your product by visiting <https://sancal.com/technical>

If you remove the cover, attach a protective cloth to the fastening strips to avoid damaging the fabric.

Importante

Información clave sobre el comportamiento de los diferentes materiales que empleamos y su conservación está disponible en: <https://sancal.com/care>

Limpie los líquidos con un trapo húmedo inmediatamente después del derrame para minimizar daños. No frote el textil.

Compruebe la hoja de características técnicas para saber si su producto es desenfundable <https://sancal.com/tecnicos>

Si decide desenfundar su producto, coloque una tela protectora sobre las cintas de sujeción para evitar daños en la tapicería.

